

2018 CATALOG

SAFETY
ASPECTS LLC

Safety Training & Consulting



On-Site & Online OSHA Safety Training
OSHA Compliance Consulting
Safety Equipment Sales

Contact us for all your safety training and equipment needs at:

www.safetyaspectsllc.com

(860) 214-7402

office@safetyaspectsllc.com

CONTENTS



WELCOME TO SAFE APPROACH

At Safe Approach, the customer gets an all-in-one service. Although you get great prices, expert advice and quality services, we are not just a sales department; we are a resource of fall protection information and services to make the workplace safer and user friendly.

The customer list grows every day, due to the variety of fall protection services as well as the quality of work that is provided by us. We strive to provide the best in customer service and we are dedicated to providing innovative fall protection to keep you and your workers safe on your job site at all times.

As you browse the catalog, you'll notice that many items are marked with a "usage" code. These codes will help you quickly select the right product for the right task. Below is a list of the codes and what each one means.

F	Product is suitable for FALL ARREST
H	Product is suitable for HEAVYWEIGHT (400lbs)
R	Product is suitable for RESTRAINT
P	Product is suitable for POSITIONING
C	Product is suitable for CLIMBING
E	Product is suitable for CONFINED SPACE ENTRY / RESCUE
T	Product is suitable for 12' Freefall (310lbs) & 6' Freefall (400lbs)

Section	Contents	Page
Harnesses	Standard	1
	Contractor	1
	Contractor Elite	1
	Climbing Series	2
	Confined Entry	2
	Welding	2
	Universe 5	3
	Universe 7	3
	Universe 7 Elite	4
	Vest Harnesses	4
Body Belts	Standard Series	5
Shock Absorbing Lanyards	Shock Pack	6, 7
	Covered	8
	Stretchable	8
Lanyards	Non-Shock Absorbing	9
Self Retracting Lifelines	Aluma-Lite	10
	Contractor Series	10
Accessories	Connectors	11
	Lanyard D-Ring Extenders	11
	Harness D-Ring Extenders	11
	Suspension Trauma Straps	11
Anchor Straps	Basket	12
	Choker	12
	Pass Through	12
	Pass Through w/ Wear Pad	12
	Concrete	12
	Cable Pass Through	12
Rope Lifelines	Standard	13
	Contractor	13
	Rope Accessories	14
Anchorage Devices	Anchorage Devices	15
Beam Clamps	Horizontal	16
	Vertical	16
Roof Anchors	Metal Roof	17
	Wood Roof	18, 19, 20
Kits	Roofer's Kits	21
	Contractor Kits	22
Horizontal Lifelines	Portable Stanchions	23
	Cable Assemblies	24
	Parts & Accessories	24
Confined Space	Rescue/Retrieval Hoist	25
	Tripod	26
	Portacover / Ladder Post	27
	Hatch Nets	28
Safety Netting	Perimeter Systems	29
	Safety Nets	30
	Debris Nets	30
Site Specific	Horizontal Fall Arrest	31
	Ladder Systems	32
	Railing Systems	33



HARNESSES

Standard Series

The standard series is our entry level or compliance harness. Low on price but not on quality, this harness is made of durable polyester webbing. It's comfortable to wear with its 3 point adjustability and ultra light weight. This harness is perfect for material handling or occasional use applications such as bucket or lift work.

Standard Series

SHOWN

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7100-01-01	Yes	No	No	Mating	1	F R
7100-01-03	Yes	Yes	No	Mating	1	F R P
7100-02-01	Yes	No	No	Tongue	1	F R
7100-02-03	Yes	Yes	No	Tongue	1	F R P



HARNESSES

Contractor Series

Suitable for all fall arrest applications, the contractor series is the workhorse of the lineup. Packed with features like five point adjustability, dual chest lanyard keepers and high quality polyester webbing make this the choice for the rigorous demands of every day use.

Contractor Series

SHOWN

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7200-01-01	Yes	No	Friction	Mating	2	F R
7200-01-03	Yes	Yes	Friction	Mating	2	F R P
7200-02-01	Yes	No	Friction	Tongue	2	F R
7200-02-03	Yes	Yes	Friction	Tongue	2	F R P



HARNESSES

Contractor Elite Series

The contractor elite harness is built to work. It features all the same quality features and materials as the contractor series but adds a tool belt, a back support pad and shoulder comfort pads. Built to work in and wear all day it's the perfect match for steel and concrete erectors.

Contractor Elite Series

SHOWN

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7300-02-03	Yes	Yes	Friction	Tongue	2	F R P



*Specify S, M, L, XL when ordering contractor elite for proper belt sizing.

HARNESSES

BODY BELTS

SHOCK ABSORBING LANYARDS

NON-SHOCK LANYARDS

SELF RETRACTING LIFELINES

ACCESSORIES

ANCHOR STRAPS

ROPE LIFELINES

ANCHORAGE DEVICES

BEAM CLAMPS

ROOF ANCHORS


KITS

HORIZONTAL LIFELINES

CONFINED SPACE

SAFETY NETTING

SITE SPECIFIC & LADDERS



HARNESSES

Climbing Series

The climbing harness features a front D-ring to aid in climbing applications where a front attachment point is preferred or necessary.



Climbing Series

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7400-02-02	Yes	No	Friction	Tongue	No	F R C
7400-02-04	Yes	Yes	Friction	Tongue	No	F R P C

SHOWN

HARNESSES

Confined Entry Series

The confined entry harness adds shoulder pads and d-rings to the contractor grade harness. The shoulder d-rings provide convenient, comfortable attachment points while a worker is entering or exiting a confined space through the use of a davit or tripod setup.



Standard Series

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7250-02-01	Yes	No	Friction	Tongue	2	F R E

SHOWN

HARNESSES

Welding Series

The welding series is the perfect choice for welding, grinding, burning or any other type of hot work. Only the highest quality Kevlar® is used with a Nomex® outer wrapping that is both durable and soft to the touch making this harness comfortable to wear all day long. The 7405-01-04 adds a front d-ring making it perfect for tower erectors.

NEW!



Welding Series

Model No.	Back D-Ring	Side D-Rings	Shoulder Buckles	Leg Buckles	Lanyard Keepers	Usage
7205-01-01	Yes	No	Friction	Mating	2	F R
7205-01-03	Yes	Yes	Friction	Mating	2	F R P
7405-01-04	Yes	Yes	Friction	Mating	2	F R P C

SHOWN



HARNESSES

BODY BELTS

SHOCK
ABSORBING
LANYARDS

NON-SHOCK
LANYARDS

SELF
RETRACTING
LIFELINES

ACCESSO-
RIES

ANCHOR
STRAPS

ROPE
LIFELINES

ANCHORAGE
DEVICES

BEAM
CLAMPS

ROOF
ANCHORS

KITS

HORIZONTAL
LIFELINES

CONFINED
SPACE

SAFETY
NETTING

SITE
SPECIFIC &
LADDERS

HARNESSES

Universe 5 Series

The new Universe 5 series harness was designed using customer feedback to provide a durable, comfortable and feature packed harness. Featuring an extra thick no tangle shoulder pad w/ terry cloth lining to reduce chafing, dual break-away lanyard keepers, 8800 lb helical webbing is extra tough yet soft to the touch, spring loaded adjusters to eliminate loosening of the webbing and a 400lb rating.

Universe 5 Series

Model No.	Back D-Ring	Side D-Rings	Shoulder Pad	Leg Buckles	Lanyard Keepers	Usage
7500-01-01	Yes	No	No	Tongue	2	F H R
7500-01-03	Yes	Yes	No	Tongue	2	F H R P
7550-02-01	Yes	No	Yes	Tongue	2	F H R
7550-02-03	Yes	Yes	Yes	Tongue	2	F H R P

SHOWN



HARNESSES

Universe 7 Series

The Universe 7 series is the first of it's kind and the first true "universal" harness. Featuring all the same upgrades as the Universe 5 series, this harness adds 2 points of adjustment for a total of 7! It adds adjusters to the back straps allowing the user to properly position the sub-pelvic strap as well as the back d-ring. Also available with lightweight aluminum quick release chest and leg buckles.


Universe 7 Series

Model No.	Back D-Ring	Side D-Rings	Shoulder Pad	Leg Buckles	Chest Buckle	Usage
7507-02-01	Yes	No	No	Tongue	Mating	F H R
7507-02-03	Yes	Yes	No	Tongue	Mating	F H R P
7507-12-03	Yes	Yes	No	Tongue	T-Buckle	F H R P
7557-02-01	Yes	No	Yes	Tongue	Mating	F H R
7557-02-03	Yes	Yes	Yes	Tongue	Mating	F H R P
7557-12-01	Yes	No	Yes	Tongue	T-Buckle	F H R
7557-12-03	Yes	Yes	Yes	Tongue	T-Buckle	F H R P

SHOWN



HARNESSES
BODY BELTS
SHOCK ABRASION LANYARDS
NON-SHOCK LANYARDS
SELF RETRACTING LIFELINES
ACCESSORIES
ANCHOR STRAPS
ROPE LIFELINES
ANCHORAGE DEVICES
BEAM CLAMPS
ROOF ANCHORS
KITS
HORIZONTAL LIFELINES
CONFINED SPACE
SAFETY NETTING
SITE SPECIFIC & LADDERS



HARNESSES
Universe 7 Elite Series

The Universe 7 Elite harness is the ultimate work harness. The Elite series adds a heavy duty tool belt and back support pad to the Universe 7. Built to work in and wear all day it's the perfect match for steel and concrete erectors.


NEW!




Universe 7 Elite Series

	Model No.	Back D-Ring	Side D-Rings	Shoulder Pad	Leg Buckles	Chest Buckle	Usage
SHOWN	7657-12-03	Yes	Yes	Yes	Tongue	T-Buckle	F H R P

*Specify S, M, L, XL when ordering Universe 7 Elite for proper belt sizing.



HARNESSES
Vest Harnesses



Replaceable Vest Attached with Hook & Loop

D-Ring Slot on Back



NEW!



- Available in Class 2 or Class 3 Vests
- High Quality Occunomix Vest with 3M Reflective Tape
- Available As An Add-On To Any Safe Approach 5-Point Harness
- Replaceable Vest Saves Cost, No Need To Replace The Whole Harness
- Convenient D-Ring Slot on Back

Harness Kits

Class 2 Economy Vest (S/M, L/XL, 2XL/3XL)	Add "-2EV" to Harness Part Number
Class 2 Premium - 3M Reflector (Medium - 6XL)	Add "-2PV" to Harness Part Number
Class 3 (Medium - 6XL)	Add "-3V" to Harness Part Number

Replacement Vest Only (with Hook & Loop Sewn In)

Class 2 Economy Vest (S/M, L/XL, 2XL/3XL)	9560
Class 2 Premium - 3M Reflector (Medium - 6XL)	9565
Class 3 (Medium - 6XL)	9570



BODY BELTS Standard Series

When used with the proper equipment, these work belts can perform multiple tasks, anything from work positioning to restraint or just simply holding tools.



8100-00-02



8100-00-01



8100-01-02

Standard Series

Model No.	Description	D-Rings	Comfort Pad	Usage
8100-00-00	Standard Tool Belt	0	No	
8100-00-01	Ladder Belt w/ Rebar Hook	1-Front	No	P
8100-00-02	Work Belt	2-Side	No	R P
8100-01-02	Work Belt	2-Side	3"	R P
8100-02-00	Tool Belt	0	6"	
8100-02-02	Work Belt	2-Side	6"	R P


SHOWN

SHOWN

SIZE CHART

Small	30-36
Medium	36-42
Large	42-48
X-Large	48-54

Waist Measurement (in.)

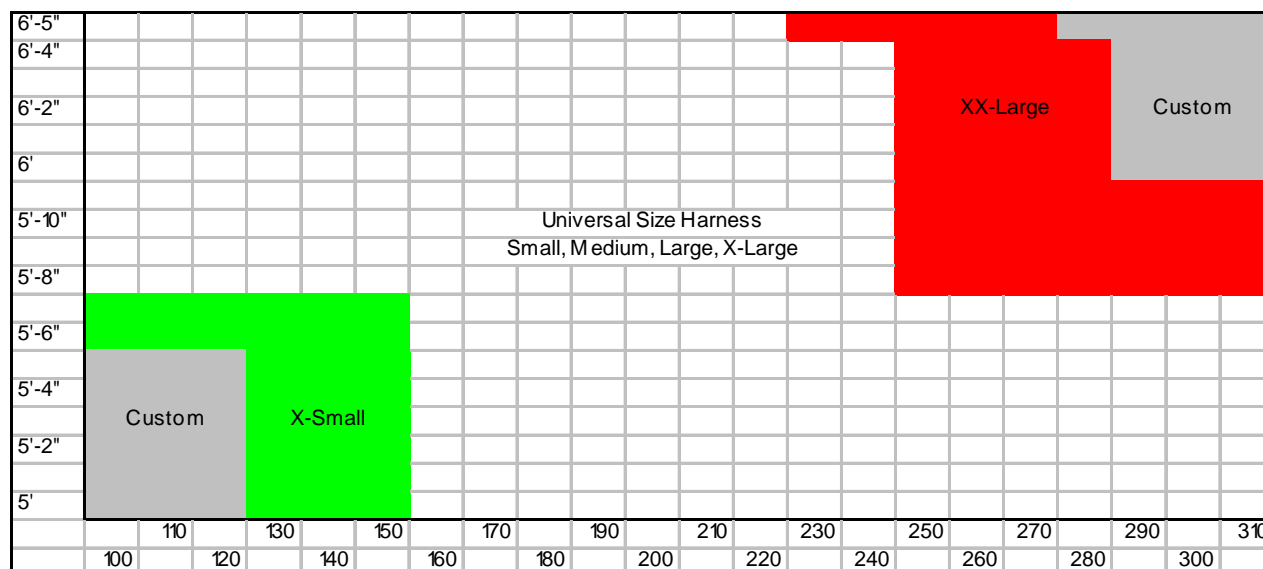



SHOCK ABSORBING LANYARDS

SHOCK ABSORBING LANYARDS

Shock Pack Series

The shock pack lanyard is a staple of any personal fall arrest system. Shock pack lanyards are durable, long lasting and are designed to keep arresting forces on the body to 900 lbs. or less. In addition to the configurations shown, these lanyards are available in almost any length up to 6' and with nearly any hook combination. Let us know if you don't see what you're looking for.

NEW!

12' Freefall & Heavyweight (400 lb) Lanyards!

All of our lanyard configurations are now available with a dual rated shock pack that allows a worker up to 310lbs to tie off at their feet (12' freefall) **OR** a worker up to 400lbs to tie off traditionally (up to a 6' free-fall)! No need to purchase two separate lanyards for 12' freefall or heavyweight, just look for the **T** !



Model No.	Snaps	Length	Usage
5106-01-01	3/4" Std.	6'	F R P
5306-01-01	3/4" Std.	6'	F T R P
5106-01-02	2-1/4" Reb.	6'	F R P
5306-01-02	2-1/4" Reb.	6'	F T R P

Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5126-01-01	3/4" Std.	No	6'	Yes	F R P
5326-01-01	3/4" Std.	No	6'	Yes	F T R P
5126-01-02	2-1/4" Reb.	No	6'	Yes	F R P
5326-01-02	2-1/4" Reb.	No	6'	Yes	F T R P



Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5146-01-01	3/4" Std.	Yes	4' - 6'	No	F R P
5346-01-01	3/4" Std.	Yes	4' - 6'	No	F T R P
5146-01-02	2-1/4" Reb.	Yes	4' - 6'	No	F R P
5346-01-02	2-1/4" Reb.	Yes	4' - 6'	No	F T R P

Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5156-01-01	3/4" Std.	Yes	4' - 6'	Yes	F R P
5356-01-01	3/4" Std.	Yes	4' - 6'	Yes	F T R P
5156-01-02	2-1/4" Reb.	Yes	4' - 6'	Yes	F R P
5356-01-02	2-1/4" Reb.	Yes	4' - 6'	Yes	F T R P



SHOCK ABSORBING LANYARDS CONT.

Shock Pack Series



Model No.	Snaps	Length	Usage
5206-01-01	3/4" Std.	6'	F R P
5406-01-01	3/4" Std.	6'	F T R P
5206-01-02	2-1/4" Reb.	6'	F R P
5406-01-02	2-1/4" Reb.	6'	F T R P



Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5226-01-01	3/4" Std.	No	6'	Yes	F R P
5426-01-01	3/4" Std.	No	6'	Yes	F T R P
5226-01-02	2-1/4" Reb.	No	6'	Yes	F R P
5426-01-02	2-1/4" Reb.	No	6'	Yes	F T R P



Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5246-01-01	3/4" Std.	Yes	4' - 6'	No	F R P
5446-01-01	3/4" Std.	Yes	4' - 6'	No	F T R P
5246-01-02	2-1/4" Reb.	Yes	4' - 6'	No	F R P
5446-01-02	2-1/4" Reb.	Yes	4' - 6'	No	F T R P



Model No.	Snaps	Adjust.	Length	Tie-Back	Usage
5256-01-01	3/4" Std.	Yes	4' - 6'	Yes	F R P
5456-01-01	3/4" Std.	Yes	4' - 6'	Yes	F T R P
5256-01-02	2-1/4" Reb.	Yes	4' - 6'	Yes	F R P
5456-01-02	2-1/4" Reb.	Yes	4' - 6'	Yes	F T R P

SHOCK ABSORBING LANYARDS

SHOCK ABSORBING LANYARDS

Covered Series

Covered series lanyards feature an internal shock core designed to keep arresting forces to 900 lbs or less, with a tubular webbing cover. Covered lanyards are compact and light weight which reduces worker fatigue, and the internal shock core provides a smoother arrest than a typical shock pack.



Model No. Snaps Length Usage

6106-01-01 3/4" Std. 6' F R P



Model No. Snaps Length Usage

6206-01-01 3/4" Std. 6' F R P



Model No. Snaps Length Usage

6106-01-02 2-1/4" Reb. 6' F R P



Model No. Snaps Length Usage

6206-01-02 2-1/4" Reb. 6' F R P

SHOCK ABSORBING LANYARDS

Stretchable Series

Stretchable lanyards combine the benefits of a covered lanyard with the added convenience of an elastic core. These lanyards stretch from approximately 4-1/2' to 6' easily. They are designed so that if they are attached to a back d-ring and one of our chest lanyards keepers, they cannot get hooked under your knee when climbing a ladder or stairs.



Model No. Snaps Length Usage

6146-01-01 3/4" Std. 4.5' - 6' F R P



Model No. Snaps Length Usage

6246-01-01 3/4" Std. 6' F R P



Model No. Snaps Length Usage

6146-01-02 2-1/4" Reb. 6' F R P



Model No. Snaps Length Usage

6246-01-02 2-1/4" Reb. 6' F R P



LANYARDS

Non-shock absorbing



5006-01-01



5046-01-02

Model No.	Snaps	Length	Usage
5006-01-01	3/4" Std.	6'	R P
5006-01-02	2-1/4" Reb.	6'	R P
5046-01-01	3/4" Std.	4' - 6'	R P
5046-01-02	2-1/4" Reb.	4' - 6'	R P

*Available in lengths 3' - 10'



Model No.	Snaps	Length	Usage
4006-01-01	3/4" Std.	6'	R P
4006-01-02	2-1/4" Reb.	6'	R P

SHOWN

*Available in lengths 3' - 10'



Model No.	Snaps	Length	Usage
3006-01-01	3/4" Std.	6'	R P
3006-01-02	2-1/4" Reb.	6'	R P

*Available in lengths 3' - 10'



8500



8650A

Model No.	Links	Rebar	Usage
8500	1" Web	Standard	P
8600	19	Standard	P
8650	19	Swivel	P
8650A	13	Swivel*	P

*All Rebar hooks fit Peri forms



SELF RETRACTING LIFELINES

Aluma-Lite Series

The Safe Approach cable series self retracting lifelines are the ultimate in versatility and durability. Designed with a heavy duty but light weight aluminum housing, these lifelines will really take a beating. The Aluma-Lite series lifelines are also certified to be used **horizontal** and for **leading edge work**! Add **full serviceability** and there just is no equal.



Model No.	3/16" Cable	Length	Usage
2220-01-01	Galvanized	20'	F
2230-01-01	Galvanized	30'	F
2240-01-01	Galvanized	40'	F
2250-01-01	Galvanized	50'	F
2260-01-01	Galvanized	60'	F



Model No.	3/16" Cable	Length	Usage
2350-01-01	Galvanized	50'	F E

*Also available in 82' and 138'

SELF RETRACTING LIFELINES

Contractor Series

The contractor series self retracting lifelines are designed to be lightweight and lower cost without sacrificing quality. They feature a high impact poly housing with a rugged steel "skeleton." At only 750lb max arresting force, these economical workhorses offer some of the lowest arresting forces in the industry. These are the perfect fit for all overhead applications.



Model 2108-01-01



Model 2111-01-01



Model 2430-01-01

SHOWN

Model No.	Webbing	Length	Usage
2108-01-01*	1-3/4" Polyester	8'	F
2108-01-00	1-3/4" Polyester	8'	F
2108-01-12*	1-3/4" Polyester	8'	F
2108-01-14*	1-3/4" Polyester	8'	F
2111-01-01*	1" Dyneema	11'	F
2120-01-01*	1" Dyneema	20'	F

*Includes carabiner

SHOWN

Model No.	Cable	Length	Usage
2410-01-01*	3/16" Galv. Cable	10'	F
2420-01-01*	3/16" Galv. Cable	20'	F
2430-01-01*	3/16" Galv. Cable	30'	F
2440-01-01*	3/16" Galv. Cable	40'	F
2450-01-01*	3/16" Galv. Cable	50'	F
2460-01-01*	3/16" Galv. Cable	60'	F

*Includes carabiner



ACCESSORIES Connectors

All connectors are forged steel with a zinc coating and double locking gate openings. They are all OSHA and ANSI Z359-2007 compliant carrying a 5,000lb overall break strength and a 3,600lb gate load.



Model 9150
7/8" Gate



Model 9155
1/2" Gate



Model 9160
2-1/4" Gate



Model 9250
3/4" Gate



Model 9260
3/4" Gate



Model 9265
3/4" Gate

D-Ring extenders are now available on all lanyard styles. A D-Ring extender offers the advantage of being able to attach a self-retracting lifeline without having to disconnect your lanyard from the dorsal d-ring of the harness eliminating the problem of multiple snap hooks on a D-Ring. It also has the added benefit of a built in rescue loop in the event of an emergency. Simply add a "D" at the end of any lanyard part number to add this versatile item.

ACCESSORIES

Lanyard D-Ring Extenders



D-Ring Extender shown on a
Shock Pack Series Lanyard.

F H R E



D-Ring Extender shown on a
Covered or Stretchable Series
Lanyard.

F H R E

ACCESSORIES

Harness D-Ring Extenders



9312




9418

Model No.	Connector	Length	Usage
9312	Snap Hook	12"	F H R E
9318	Snap Hook	18"	F H R E
9412	Soft Loop Choker	12"	F H R E
9418	Soft Loop Choker	18"	F H R E

ACCESSORIES

Suspension Trauma Straps

Available for any harness, these devices are one of the best ways to reduce the risks of Orthostatic Intolerance, or Suspension Trauma as it is commonly called.



9625

ANCHOR STRAPS**Basket Series**

Model No.	Length	Usage
8713	3'	F R P
8714	4'	F R P
8716	6'	F R P
87110	10'	F R P
87112	12'	F R P

Basket Style Anchor Strap
Heavy Duty 2" 10,000lb webbing.
(2) D-Rings to be connected using provided carabiner
(1) Carabiner used as fall arrest attachment

ANCHOR STRAPS**Choker Series**

Model No.	Length	Usage
8723	3'	F R P
8724	4'	F R P
8726	6'	F R P
87210	10'	F R P
87212	12'	F R P

Choker Style Anchor Strap
Heavy Duty 2" 10,000lb webbing.
(1) Loop for choke cinching
(1) D-Ring for fall arrest attachment

ANCHOR STRAPS**Pass Through Series**

Model No.	Length	Usage
8733	3'	F R P
8734	4'	F R P
8736	6'	F R P
87310	10'	F R P
87312	12'	F R P

Pass Through Style Anchor Strap
Heavy Duty 2" 10,000lb webbing.
(1) Large D-Ring for pass through cinching
(1) D-Ring for fall arrest attachment

ANCHOR STRAPS**Pass Through w/ Wear Pad**

Model No.	Length	Usage
8733P	3'	F R P
8734P	4'	F R P
8736P	6'	F R P
87310P	10'	F R P
87312P	12'	F R P

Pass Through Style Anchor Strap
Heavy Duty 2" 10,000lb webbing.
(1) Large D-Ring for pass through cinching
(1) D-Ring for fall arrest attachment
(1) Heavy Duty 3" wear pad for extended life

ANCHOR STRAPS**Concrete Series**

Model No.	Length	Usage
8723P	3'	F R P
8724P	4'	F R P
8726P	6'	F R P
87210P	10'	F R P
87212P	12'	F R P

Choker Style Anchor Strap for use during concrete construction
Heavy Duty 1-3/4" polyester webbing
(1) Loop for pass through cinching
(1) D-Ring for fall arrest attachment
Heavy duty, full length tubular wear sleeve resists abrasion

ANCHOR STRAPS**Cable Pass Through**

Model No.	Length	Usage
8433	3'	F R P
8434	4'	F R P
8436	6'	F R P
84310	10'	F R P
84312	12'	F R P

Pass Through Style Anchor Sling
5/16" Galvanized Wire Rope
(1) Large O-Ring for pass through cinching
(1) O-Ring for fall arrest attachment



ROPE LIFELINES

Standard Series

Standard series vertical rope lifelines are manufactured from 5/8" 3-strand polypropylene/polyethylene blend rope with a 10,600lb breaking strength. This blend is very strong and resists abrasion well. It is also perfect for wet locations as this type of material will not absorb water, making it very mold and mildew resistant.



One End **Snap Hook**
One End **Thimble**

Model No.	Length	Usage
2625-03-02	25'	F R
2650-03-02	50'	F R
2675-03-02	75'	F R
2600-03-02	100'	F R



One End **Snap Hook**
One End **Taped**

Model No.	Length	Usage
2625-03-00	25'	F R
2650-03-00	50'	F R
2675-03-00	75'	F R
2600-03-00	100'	F R



Both Ends **Snap Hook**

Model No.	Length	Usage
2625-03-03	25'	F R
2650-03-03	50'	F R
2675-03-03	75'	F R
2600-03-03	100'	F R



One End **Thimble**
One End **Spliced**

Model No.	Length	Usage
2625-02-01	25'	F R
2650-02-01	50'	F R
2675-02-01	75'	F R
2600-02-01	100'	F R

ROPE LIFELINES

Contractor Series

Contractor series vertical rope lifelines are manufactured from 5/8" 3-strand polyester/dacron blend rope with a 10,400lb breaking strength. This blend is durable, long lasting, resists abrasion and uv degradation. Contractor series ropes are softer and more pliable, making them the choice for the discerning customer.



One End **Snap Hook**
One End **Thimble**

Model No.	Length	Usage
2525-03-02	25'	F R
2550-03-02	50'	F R
2575-03-02	75'	F R
2500-03-02	100'	F R



One End **Snap Hook**
One End **Taped**

Model No.	Length	Usage
2525-03-00	25'	F R
2550-03-00	50'	F R
2575-03-00	75'	F R
2500-03-00	100'	F R



Both Ends **Snap Hook**

Model No.	Length	Usage
2525-03-03	25'	F R
2550-03-03	50'	F R
2575-03-03	75'	F R
2500-03-03	100'	F R



One End **Thimble**
One End **Spliced**

Model No.	Length	Usage
2525-02-01	25'	F R
2550-02-01	50'	F R
2575-02-01	75'	F R
2500-02-01	100'	F R



ANCHORAGE DEVICES

NEW!



Model 00625 – Jersey Barrier Railing Clamp

- Clamps to the top of any standard concrete Jersey Barrier to make a railing post for 2x4 lumber.
- Allows the use of Jersey Barriers as a legal standard railing by quickly creating a top rail at or above 42" height.
- When proper railing material and spacing is used, it will meet all OSHA requirements for a railing.

NEW!



Model 00640 – Class III Hitch Anchor
Great for mining or excavation applications where there is frequently no other place to anchor to than a vehicle.
Fits class III receivers.
5,000lb Anchorage Point

F R P



Model 00720 – D-Ring Anchor Plate
Model 00720S – D-Ring Anchor Plate-Stainless
May be bolted or welded on.
Can be used horizontally or vertically
5,000lb Anchorage Point

F R P




Model 00699 – Flange Clamp
Great for attaching to a C-channel or other single flange anchor point.
Fits 1/2" - 2-1/4" flange thicknesses
5,000lb Anchorage Point

F R P



Model 00630 – Wireform Anchor
Stainless Steel
6" opening capacity
5,000lb Anchorage Point

F R P

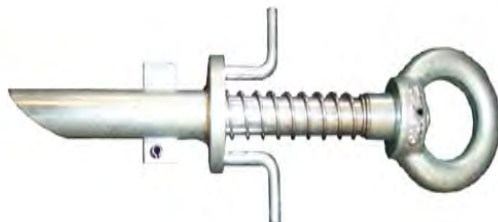

Model 00650 – Grip Anchor
Fits 11/16" to 1" diameter holes
Maximum depth - 1-9/16"
Can be used horizontally or vertically
5,000lb Anchorage Point

F R P



Model 00620 – Rail Grabber
Fits 40lb/yd to 115lb/yd track
5,000lb Anchorage Point

F R



Model 00655 – Hole Anchor
Fits 3/4" diameter concrete hole
Easy release button
5,000lb Anchorage Point

F R P

**BEAM CLAMPS****Horizontal Series**

Safe Approach horizontal beam clamps are a moveable, portable anchorage device when working on or near a structural I-Beam. The Clamps are designed to slide easily along with the worker on the top or bottom flange of the beam.



Model

Horizontal Series

Model No.	Description	Flange Widths	Max Flange Thickness	Usage
00219	14" Sliding Beam Clamp	3-1/2" - 14"	1-1/4"	F R P
SHOWN 00335	14" Sliding Beam Clamp, Both Ends Adjustable	3-1/2" - 14"	1-1/4"	F R P
SHOWN 00225	14" Ratcheting Beam Clamp	3-1/2" - 14"	1-1/4"	F R P
00220	24" Sliding Beam Clamp	18" - 24"	2-3/4"	F R P
00220-1	24" Sliding Beam Clamp, Both Ends Adjustable	12" - 24"	2-3/4"	F R P

BEAM CLAMPS**Vertical Series**

Safe Approach vertical beam clamps are a fall arrest anchorage device for vertical "I" or "H" beams. The clamps provide a fixed anchorage point for one or two people depending on the model. Custom sizes may be available the anchors below. Please call with your requirements.



Model 00227



Model 00016



Model 00226

Vertical Series

Model No.	Description	Flange Widths	Max Flange Thickness	Max # Workers	Suitable for Horizontal Lifeline	Usage
00227	12" Vertical Beam Clamp	4-1/2" - 12"	1"	1	Single Person Rope Lifeline Only	F R P
00016	12" Vertical Beam Clamp—Model M	4-1/2" - 12"	1"	2	Yes	F R P
00226	Irregular Flange Chain Clamp	Various	Various	1	Single Person Rope Lifeline Only	F R P



ROOF ANCHORS

Metal Roof Series

STANDING SEAM ROOF CLAMP


The Standing Seam Roof Clamp provides continuous protection and freedom of movement on flat or sloped seamed roofs.

Model **00086**
Fits Seam Sizes:

- 12" - 18"
- 24" - 36"

Model **00086-2**
Fits Seam Sizes:

- 10" - 16"
- 20" - 32"

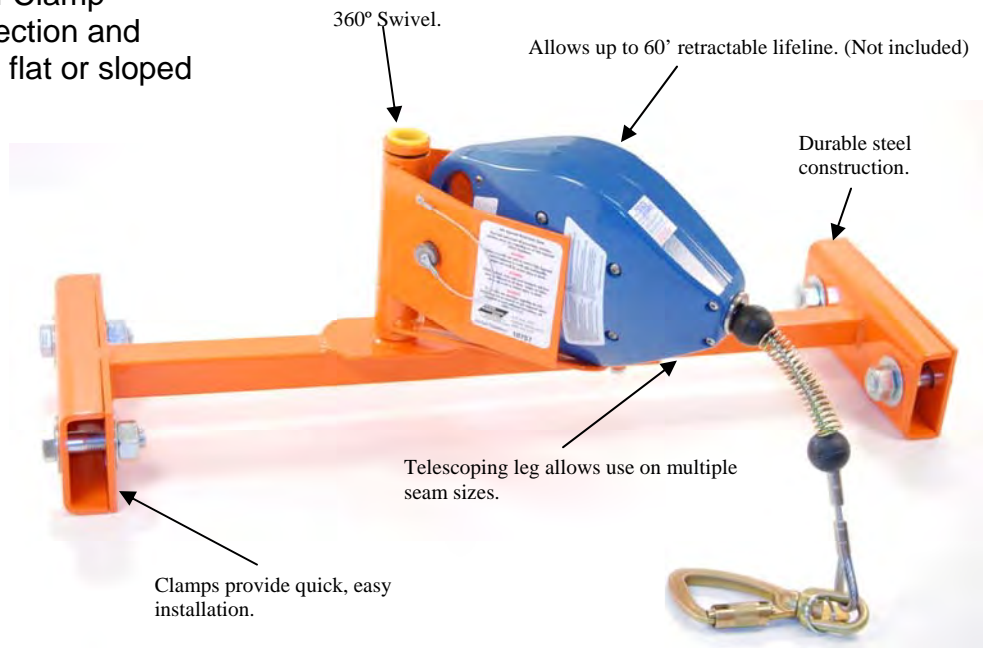


B & R Roof Anchor


The B & R Roof Anchor provides continuous protection and freedom of movement on Type B & Type R roof decking as well as flat metal roofs. It's light weight and screw down installation allow for quick easy installation.

Model **00601**

- Fits Type B & Type R Roof Decking
- Works on flat metal roofs
- Metal Decking must be at least 22 gauge.

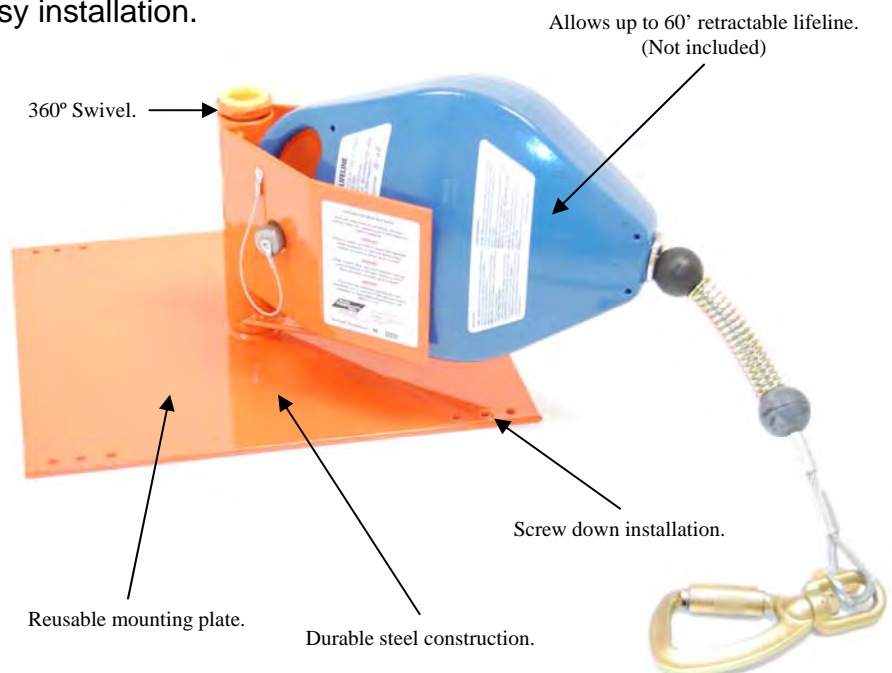

* Items shown do not include self retracting lifelines.



ROOF ANCHORS

Wood Roof Series



RIDGE ANCHOR

The Safe Approach ridge anchor is an ultra lightweight, quick and easy nail in anchor that folds flat when finished making this a cinch to install and carry from job to job. It's also **reusable**, making it even more economical than the single use throw away anchors that look similar.

Model 00338

SCREW DOWN ROOF ANCHOR

The screw down roof anchor is a roof mounted fall protection system designed for use on a wood roof. The 360° swiveling D-Ring allows workers free movement while tied-off to a rope lifeline. Lightweight, reusable, and easy nail in installation makes this anchor the contractor's choice for nearly all wood roof applications.



Model 00236

SCREW DOWN ROOF ANCHOR FOR SRL'S

The screw down roof anchor for SRL's has a 360° swiveling basket to hold up to a 60' retractable lifeline. This convenient setup keeps the SRL off the roof and rotating freely for greater ease of movement. Lightweight and portable, this anchor provides a quick solution to your fall protection needs.



Model 00336

ADJUSTABLE/SWIVEL RIDGE ANCHOR

Mount this anchor at the peak of the roof, put up to a 60' self retracting lifeline in the 360° swiveling basket and work both sides of the roof without having to move the anchor! This anchor is the ultimate in flexibility, and with its durable powder coated steel finish will provide years of trouble free service.



Model 00696

* Items shown do not include self retracting lifelines.



ROOF ANCHORS

Wood Roof Series



NEW!

PERMANENT ROOF ANCHOR

The Safe Approach permanent roof anchor is made to be installed under the tab of a roof shingle and left in place for future access. The anchor is made of durable long lasting stainless steel and zinc plated forged steel, and then powder coated black so that it won't stand out on a residential roof. This anchor is inexpensive and a perfect value added component for anyone doing routine and regular maintenance on a residential roof such as chimney sweeps or solar panel contractors. Tested to 5,000 lbs, this anchor will also meet ANSI requirements.



Model BC06082

SCREW DOWN ROOF ANCHOR—HEAVY DUTY

The screw down roof anchor is a temporary roof mounted fall protection anchor designed for use on a wood roof. It is lightweight, reusable and features easy screw down installation. This anchor is tested to 5,000lbs making it compliant with ANSI.

NEW!



Model BC06081


TEMPORARY RESIDENTIAL LIFELINE KIT

NEW!



Model 69640

- Attaches to Trusses or Rafters
- Easily And Quickly Installs In Just Minutes
- Only Requires A Minimum 2x4 Top Chord + 7/16 Minimum Sheathing
- Attaches At The Peak To Provide 100% Access To Both Sides Of The Roof
- Comes In a Handy Duffel Bag
- Works On Any Pitch Roof Up To 12/12
- Works with SRL or Vertical Rope Lifeline
- 2-Person Capacity

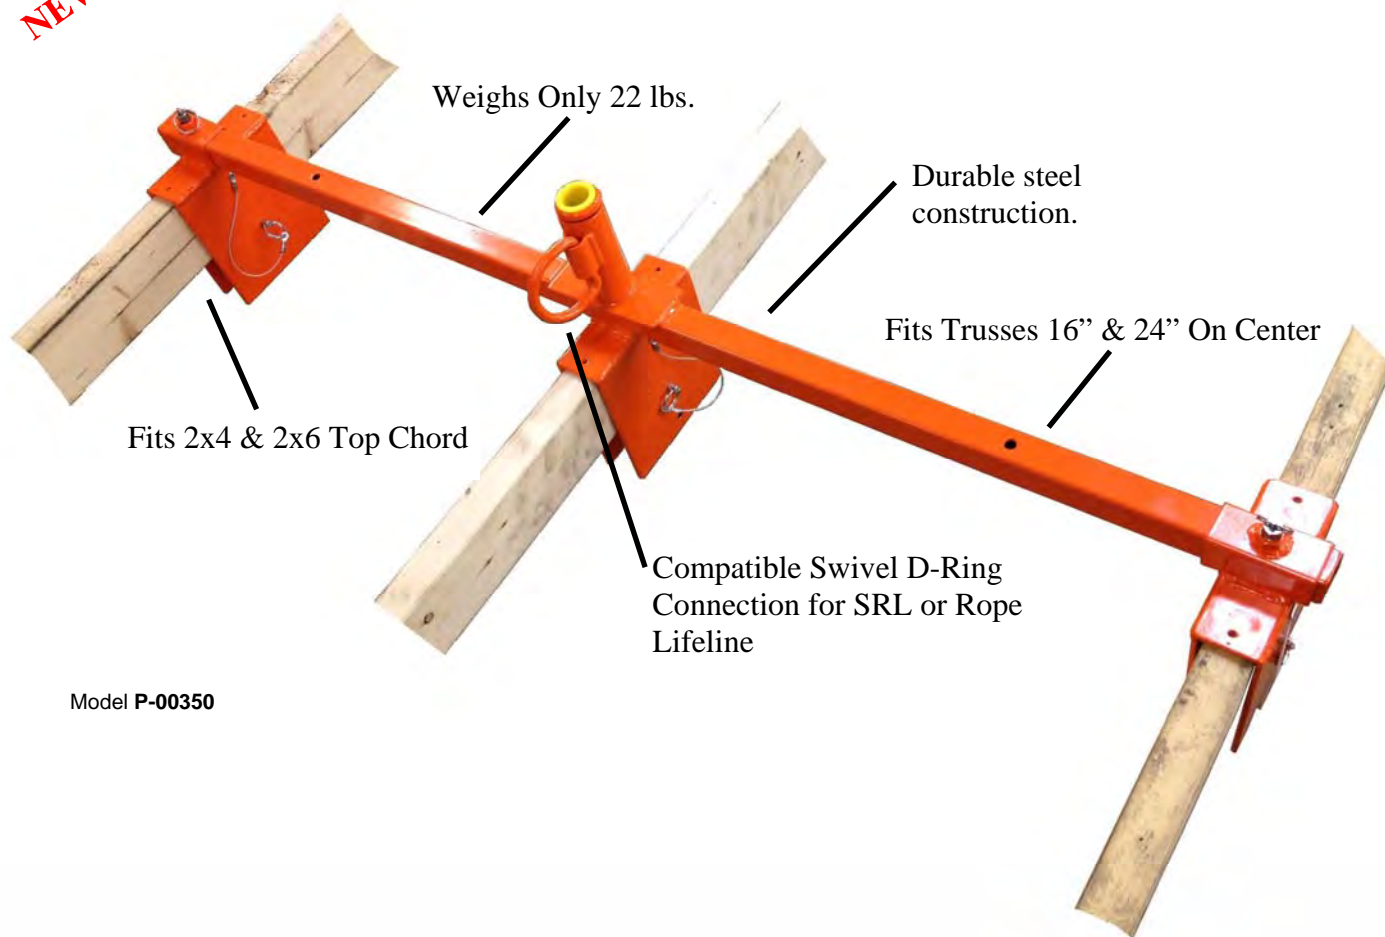**ROOF ANCHORS****Wood Roof Series****NEW!**Model **P-00350****TRUSS ANCHOR**

The Truss Anchor provides a temporary fall arrest anchorage point for work on truss roofs. It's lightweight at only 22 lbs and installs in seconds. Simply adjust it to the right spacing, slip it over the top cord of three trusses, install the retainer pins and drive six 16d nails through the top holes.

**KITS****Roofer's Kits****Roofer's Kits**

Roofing is one of the most dangerous jobs in the construction industry. These kits take the guesswork out of selecting compatible products to provide a safe work environment while still allowing the worker the mobility he needs. Below are some popular combinations but they can be configured to include nearly any combination of products Safe Approach offers. Contact us and let us know what your specific requirements are.

Elite Series "A" Kit

Model No.	Harness	Lanyard	Rope Grab	Roof Anchor	Rope Length
1125-A2-12	Universe 7 7557-12-01	3'	Self Tracking	00338-Reusable Ridge Anchor	25' Polypro Blend
1150-A2-12	Universe 7 7557-12-01	3'	Self Tracking	00338-Reusable Ridge Anchor	50' Polypro Blend
1175-A2-12	Universe 7 7557-12-01	3'	Self Tracking	00338-Reusable Ridge Anchor	75' Polypro Blend
1100-A2-12	Universe 7 7557-12-01	3'	Self Tracking	00338-Reusable Ridge Anchor	100' Polypro Blend

Contractor Series "B" Kit

Model No.	Harness	Lanyard	Rope Grab	Roof Anchor	Rope Length
1125-B2-12	Universe 5 7550-02-01	3'	Self Tracking	00338-Reusable Ridge Anchor	25' Polypro Blend
1150-B2-12	Universe 5 7550-02-01	3'	Self Tracking	00338-Reusable Ridge Anchor	50' Polypro Blend
1175-B2-12	Universe 5 7550-02-01	3'	Self Tracking	00338-Reusable Ridge Anchor	75' Polypro Blend
1100-B2-12	Universe 5 7550-02-01	3'	Self Tracking	00338-Reusable Ridge Anchor	100' Polypro Blend

Standard Series "C" Kit

Model No.	Harness	Lanyard	Rope Grab	Roof Anchor	Rope Length
1125-C2-12	Contractor 7200-01-01	3'	Self Tracking	00338-Reusable Ridge Anchor	25' Polypro Blend
1150-C2-12	Contractor 7200-01-01	3'	Self Tracking	00338-Reusable Ridge Anchor	50' Polypro Blend
1175-C2-12	Contractor 7200-01-01	3'	Self Tracking	00338-Reusable Ridge Anchor	75' Polypro Blend
1100-C2-12	Contractor 7200-01-01	3'	Self Tracking	00338-Reusable Ridge Anchor	100' Polypro Blend

Basic Series "D" Kit

Model No.	Harness	Lanyard	Rope Grab	Roof Anchor	Rope Length
1125-11-12	Standard 7100-01-01	3'	Manual	00338-Reusable Ridge Anchor	25' Polypro Blend
1150-11-12	Standard 7100-01-01	3'	Manual	00338-Reusable Ridge Anchor	50' Polypro Blend
1175-11-12	Standard 7100-01-01	3'	Manual	00338-Reusable Ridge Anchor	75' Polypro Blend
1100-11-12	Standard 7100-01-01	3'	Manual	00338-Reusable Ridge Anchor	100' Polypro Blend



KITS
Contractor's Kits



Contractor Kits

These convenient contractor kits are a great way to get the fall protection you need and get a convenient carry and storage bag. Below are a few of our popular kits, but they can be created in nearly any combination you need. Contact Safe Approach with your specific requirements and we can put together a kit for you.


Contractor Kits

Model No.	Description	Harness	Lanyard	Bag
1250-97-50D	Elite "A" Kit	Universe 7 Elite 7657-12-03	Twin Leg, Adjustable, Tie-Back, Rebar, D-Ring Ext. 5456-01-02D	24"
1250-95-68D	Universe "B" Kit	Universe 7 7557-12-03	Twin Leg, Stretchable, Rebar, D-Ring Ext. 6246-01-02D	20"
1250-84-68D	Universe "C" Kit	Universe 5 7550-02-03	Twin Leg, Stretchable, Rebar, D-Ring Ext. 6246-01-02D	20"
1250-73-64	Standard "D" Kit	Contractor 7200-02-01	Twin Leg, Covered, Rebar 6206-01-02	20"
1250-73-51	Basic "E" Kit	Contractor 7200-02-01	Single Leg, Covered, Std. Hooks 6106-01-01	20"

HORIZONTAL LIFELINES
Portable Stanchions

Stanchions

The Safe Approach portable horizontal lifeline system takes the worry out of fall protection by providing an easy to install tie-off for multiple workers that must work at height before flooring or other fall protection is available. Available for multiple sizes and types of beams, these stanchions are packed with features.

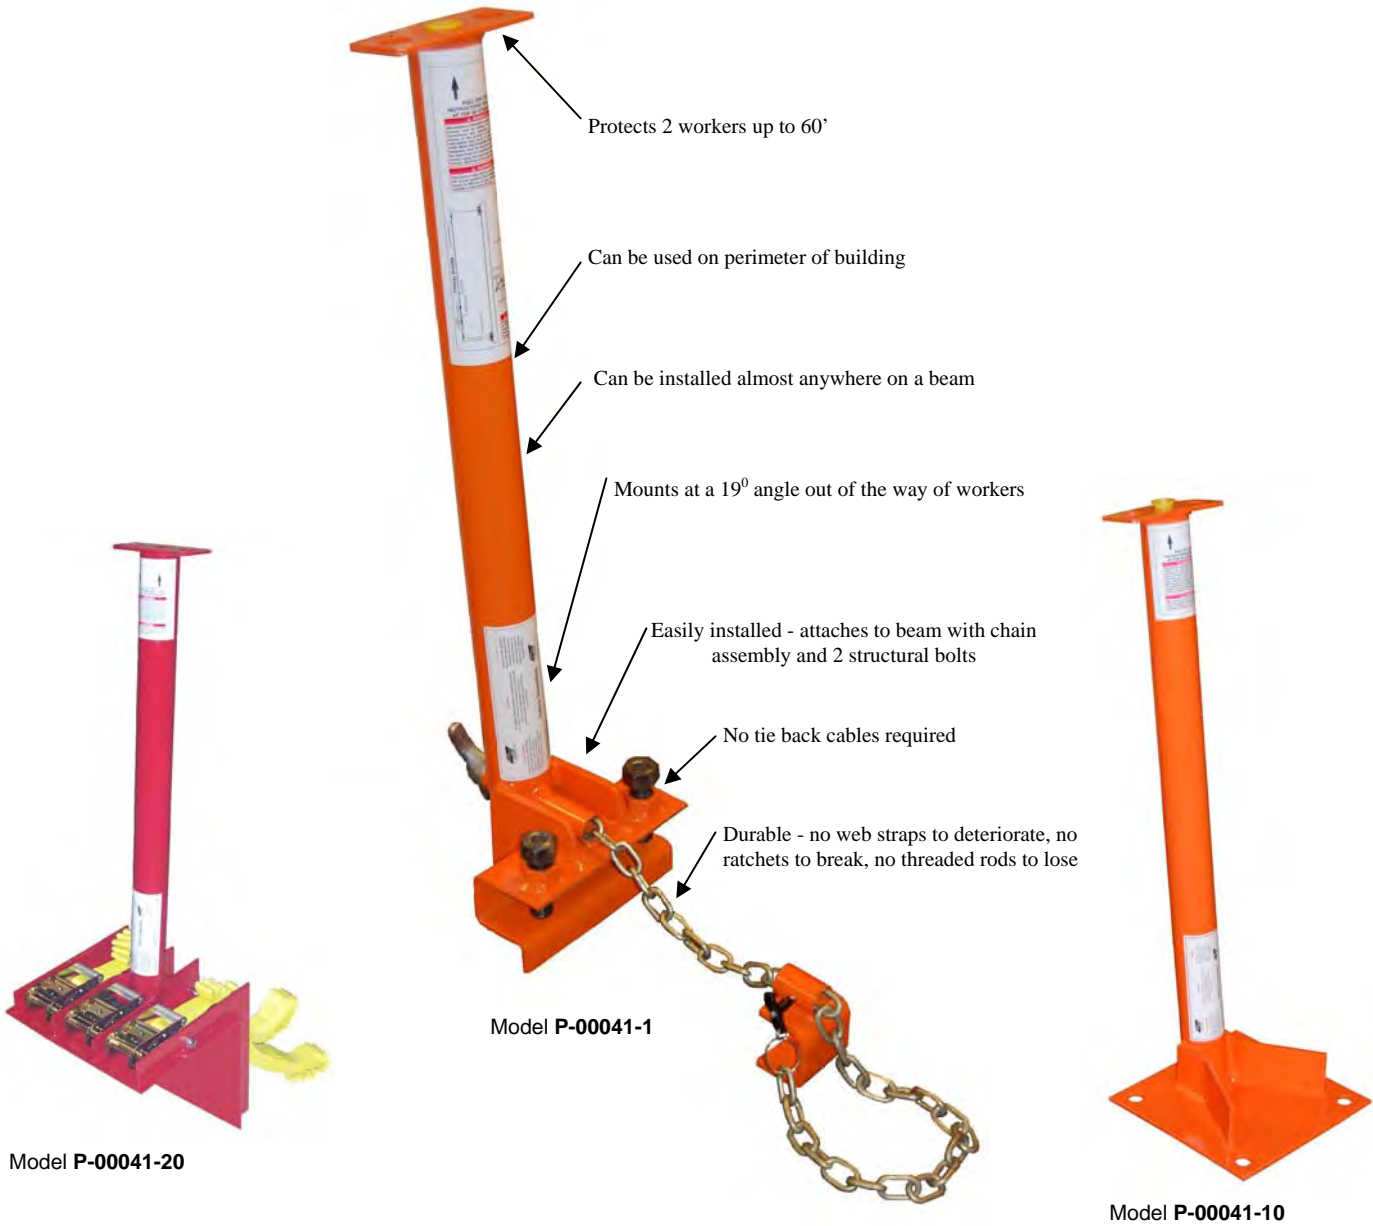

Model No.	Description	Min Flange	Max Flange	Max Cable	Usage
P-00041-1	Steel I-Beam Portable Stanchion	1/2" x 8"	2-1/4" x 32"	60'	F R
P-00041-2	Wide Mouth Portable Stanchion	1-3/4" x 8"	3-1/2" x 32"	60'	F R
P-00041-10	Concrete Stanchion (or Steel bolt-on)	1/2" x 12" (steel)	None	60'	F R
P-00041-20	Strap Stanchion for Concrete or Box Beams	12" x 12" (box beam)	None	60'	F R




HORIZONTAL LIFELINES

Cable Assemblies

The Safe Approach horizontal lifeline system is designed to be used seamlessly with all of our portable stanchions. Made of long lasting, heavy duty galvanized cable, this system is rated for up to 2 workers over a maximum span of 60'. Installs quickly and easily.



Model No.	Description	Energy Absorber	Usage
P-00147-40	40' Horizontal Lifeline Assembly	Yes	F
P-00147-60	60' Horizontal Lifeline Assembly	Yes	F
P-00148-40	40' Horizontal Lifeline Assembly	No	F R
P-00148-60	60' Horizontal Lifeline Assembly	No	F R



HORIZONTAL LIFELINES

Parts & Accessories



Model **P-00041-10**
Pass Through Device
Works on all Safe Approach stanchions



Model **P-00039-1**
Inline Energy Absorber

	Model No.	Description
SHOWN	P-00039-1	Inline Energy Absorber
	P-00149-1	2-1/4" Flange Adapter
	P-00149-2	3-1/2" Flange Adapter
SHOWN	P-00149-3	Bolt-on Stanchion Pass Through Device
SHOWN	P-00149-4	Stanchion Adapter Plate
	P-00041-CA	Stanchion Chain Assembly
	P-00041-1B	Stanchion Mounting Bolt
	P-00041-1P	Stanchion Pin
	P-00147-SH	Cable Assembly Shackle
	P-00147-LT	Cable Assembly Adjustable Clamp/Thimble
	P-00147-TH	Cable Assembly Thimble
	P-00147-TB	Cable Assembly Turnbuckle




Model **P-00149-4**
Stanchion Adapter plate: allows use of
P-00041-2 on smaller flange sizes
(Requires P-00149-1)



CONFINED SPACE SAFETY

Rescue/Retrieval Hoist

The Safe Approach man hoist is an efficient and economical alternative to a tripod for confined space entry and rescue. It's ultra light due to the high strength aluminum construction. A continually braking mechanical winch with a standard 50' working length galvanized steel cable provides an adequate lifeline for most entry/rescue situations. A standard tie-off point provides a convenient anchor point for fall protection devices where required.

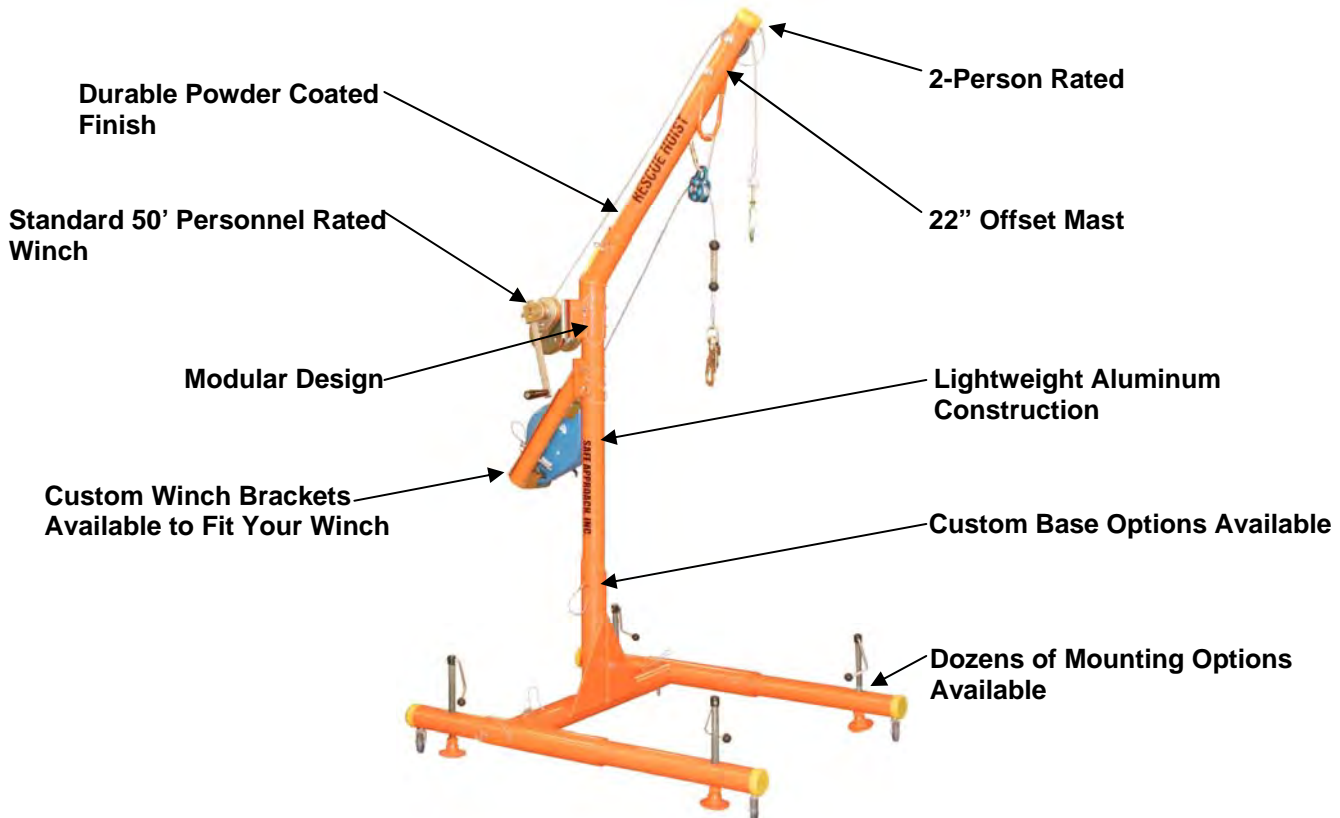

SHOWN

Model No.	Item	Description	Winch	Usage
00697-2	Complete Davit System	2 Person Hoist w/ Adjustable Base & Winch	Yes	F E
00697-3		2 Person Hoist w/ Adjustable Base	No	F E
00697-4		2 Person Hoist w/ Adj. Base, Winch & 3-Way Kit	Yes	F E
00697-MW	Mast Only	2 Person Rated Mast	Yes	F E
00697-M		2 Person Rated Mast	No	F E
00697-BA	Base Only	Portable Adjustable Let Base	No	
00697-CMS		Permanent Center Mount Floor Sleeve	No	
00697-FMS		Permanent Floor Mount Sleeve	No	
00697-WMS		Permanent Wall Mount Sleeve	No	
00697-W	Winch Only	50' Personnel Rated Hoist (Single Person Rated)	Yes	E
2350-01-01		50' 3-Way Recovery Unit	Yes	F E
00697-WB	Accessories	Mounting Bracket for 50' Hoist	No	
00697-WSB		Mounting Bracket for 60' 3-Way Recovery Unit	No	
00697-PB		Pulley Block w/ Carabiner	No	
00697-WP		Pressure Plate for Winch	No	



CONFINED SPACE SAFETY

Tripod

The Safe Approach tripod is an economical, fast, easy to use system for confined space entry and retrieval or emergency rescue. It's ultra light due to the high strength aluminum construction. Two standard tie-off points provides a convenient anchor point for fall protection devices where required. A full range of accessories is available to tailor it to a variety of confined space entry or rescue scenarios. The tripod is adjustable in height from 6' - 11' and is rated for up to 2 workers at a time.



Model No.	Item	Description	Usage
00698-1	Complete	Tripod, Bracket, 50' 3-Way Winch, Storage Bags	F E
00698-2	System	Tripod, Bracket, 50' Work Winch, Storage Bags	F E
00698-3		Tripod, Brackets, 50' Work Winch, 50' 3-Way, Storage Bags	F E
00698	Tripod Only	6' - 11' Adjustable Height Tripod	F E
00697-W	Winch Only	50' Personnel Rated Work Winch (Single Person Rated)	E
2350-01-01		50' 3-Way Recovery Unit	F E
00698-WB	Accessories	Mounting Bracket for 50' Work Winch	
00698-WSB		Mounting Bracket for 50' 3-Way Recovery Unit	
00697-WP		Pressure Plate for Winch	
8152		Work Seat With Belt	E
9350		Lifting Yoke Without Spreader	E
9351		Lifting Yoke With Spreader Bar	E
96362		Retrieval Wristlets Without Spreader	E
96364		Retrieval Ankle Without Spreader (Not For Vertical Lift)	E



P-00697-W—50' Work Winch



8152—Work Seat w/ Belt



9351—Lifting Yoke w/ Spreader

9350—Without Spreader

2350-01-01—50' 3-Way Winch



96362—Rescue Wristlets

96364—Rescue Anklets*

* Anklets have mating buckles instead of choke loop



CONFINED SPACE SAFETY

Portacover

The Portacover from Safe Approach is a unique, lightweight net system that will greatly reduce the risk of falls into open manholes. The system is designed to be quickly installed in any type of manhole. The Portacover system does not restrict light, visibility or ventilation, and is easily removed to facilitate access.


The Portacover meets all applicable OSHA and ANSI requirements and has been tested to 4,000 lbs. The system protects you from costly lawsuits, time lost through accidents and OSHA citations and fines. It can also lower worker's compensation and liability costs.

The Portacover offers protection not offered by cones and barricades.



FEATURES

- Easily placed and secured by one person in seconds.
- Lightweight at only 35lbs.
- Highly visible colors
- 4,000lb capacity
- Allows ventilation and easy access
- Fits 20" - 32" manhole openings
- Sewn with Teflon thread, not affected by UV radiation, acid rain, industrial pollutants or solvents.

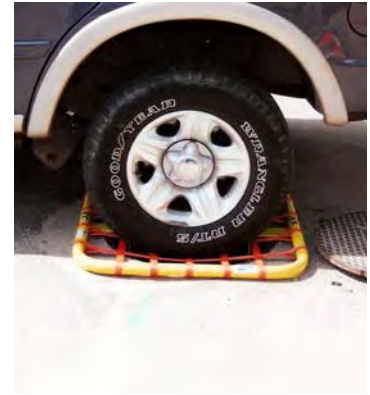

Model No.	Item	Description	Fits
P-150015	Portacover	Standard Portacover with Stainless T-Handles	20" - 32"
P-150017	Portacover	Portacover with 1 Stainless T-Handle & 1 Stainless Spring Loaded Handle	24" - 36"

CONFINED SPACE SAFETY

Ladder Safety Post

The ladder safety post is an economical solution to two common problems with ladder access:

1. Having something to grab on to while entering and exiting the top of a fixed ladder.
2. Providing a practical, useful fall arrest system.

FEATURES

- Durable stainless steel construction
- Retractable design stores underneath the hatch cover
- Internal gas charged spring assisted lift mechanism
- Meets all OSHA requirements for a fall arrest anchor when used with a self retracting lifeline.
- Provides a hand hold when entering and exiting the top of a ladder
- Works with any self retracting lifeline

Model No.	Item	Description
P-00551	Ladder Safety Post	Ladder Safety Post, Automatic Lift Piston & SRL Attachment
P-00555	Ladder Safety Post	Ladder Safety Post, manual extension, SRL Attachment

* Standard post fits up to 1" rungs, 12" on center. Other configurations are available, please contact Safe Approach for details. Kit does not include Self Retracting Lifeline.



*Patented



Model Hatch Net 121



- Sewn with Teflon thread, not affected by UV radiation, acid rain, industrial pollutants or cleaning agents
- All systems are shipped completely assembled including attaching hardware
- Easily installed in virtually any floor or roof opening, new or existing applications in minutes
- Retracts easily for access to confined space or to pull pumps and equipment
- Greatly improves employee safety while allowing freedom of movement and full visibility of area below net
- Meets or exceeds all current OSHA and ANSI standards
- Many sizes in stock, custom sizes are manufactured in days at no additional cost.
- Full five (5) year warranty on materials and workmanship

The Hatch Net system can help you drastically reduce the risk of death or injuries from a fall through in almost any hatch installation. It meets or exceeds all current OSHA and ANSI regulations, affording valuable protection from costly lawsuits, lost time accidents, and OSHA citations and fines. With a safer workplace and fewer accidents, it can also lower worker's compensation and liability costs.


The Hatch Net design allows for 85% or more of normal day to day procedures to be performed without opening the net. This means one person can safely perform most inspections and routine maintenance without the need for an additional worker or cumbersome fall protection equipment.



Model Hatch Net 120S



Model No.	Rails	Brackets	Mounting Hardware	Netting	Thread
Hatch Net 121	Aluminum	Aluminum	Stainless	Polyester	Teflon
Hatch Net 120S	Stainless	Stainless	Stainless	Polyester	Teflon



SAFETY NETTING Perimeter Systems

**Light Weight,
Heavy Duty
Perimeter Safety
And Debris Netting
System.**

***Light enough to install without the use of a crane,
strong enough for personnel use up to 30 feet !***

- ➔ Meets OSHA standards for fall arrest up to 30'
- ➔ Catches bricks, block, reshore posts, hand tools and general construction debris
- ➔ Light enough to install without the use of a crane
- ➔ Provides safety and security for personnel, equipment and the public below
- ➔ Affords protection up to 15' from the face of the slab
- ➔ Clamp on mounting hardware is non-destructive
- ➔ Custom applications available to fit nearly any building
- ➔ Available for slab thicknesses from 6" up to 24"!




Non-Destructive
Clamp On Bracket

Model No.	Description	Material
P-00700	20' Perimeter Arm Assembly	Aluminum/Steel
P-00700-SG	Slab Grabber Bracket (6" - 12" Slab)	Steel
P-00700-SGL	Slab Grabber Bracket (12" - 18" Slab)	Steel
P-00700-SGXL	Slab Grabber Bracket (18" - 24" Slab)	Steel
P-00700-SG30	Slab Grabber Bracket (24" - 30" Slab)	Steel
P-00700-SB	Bolt On Mounting Bracket	Steel
P-00700-CB	Column Mounting Bracket	Steel/Polyester
P-00700-EC	35' Exterior Cable Assembly	Steel
P-00700-IC	175' Interior Cable Assembly	Steel
P-00700-EB	Eye Bolt Assembly	Steel
P-00700-PB	10' Pole End Brace Assembly	Aluminum/Steel

The Safe Approach perimeter debris netting systems are an effective, economical way to protect a jobsite from falling personnel, debris and tools. Falling debris can seriously injure or kill workers or the public below. It can also cause serious and costly damage to equipment, structures, vehicles and even other building materials. This system is a **tested**, proven way to prevent injury, damage and **protect you from costly liability**. Our experienced, knowledgeable staff can help you with even the toughest applications.





SAFETY NETTING

Safety Nets

DESCRIPTION

The Safe Approach personnel safety netting is a heavy duty netting designed to arrest the fall of a worker for up to 30 feet. It can also be used for heavy duty debris containment when combined with a fine mesh debris liner.



Item	Size	Material	Tested
Netting	3-1/2" Diamond Mesh	Type 6,6 Nylon	ANSI A10.11
Border Rope	1/2"	Type 6,6 Nylon	7,000 lbs.
Snap Hooks	7/16" x 120mm	Zinc Plated Steel	2,200 lbs.

Our safety nets are manufactured from only the highest quality materials. All of our safety nets are manufactured from 100% Type 6,6 Nylon. Nylon has excellent stretch properties allowing the net system to absorb energy during an impact, making it the perfect material for a safety net. And all of our safety nets are treated with a heavy duty UV blocker to prevent degradation from the sun's harmful radiation.

Safe Approach offers many standard sizes, but we can custom fabricate a safety net to fit nearly any size and shape. Give us your specifications and let us design a net solution for you.

NEED THE HARDWARE TOO? No problem. We have the ability to design and fabricate the complete package. We can provide all the cables and attaching hardware as well as anchor points if necessary.

SAFETY NETTING

Debris Nets

Safe Approach offers a full line of debris netting, both by the roll and fabricated to size.

Debris nets can be added to any safety net to make the safety net dual purpose, providing both fall arrest and heavy duty debris containment.



Debris nets are offered in both roll form. and finished panel sizes.

Whatever the need, Safe Approach has a debris net to meet your requirements.



SITE SPECIFIC FALL PROTECTION SYSTEMS

Horizontal Fall Arrest

Safe Approach designs, fabricates and installs site specific fall protection systems such as:

- **Horizontal Lifeline Systems** for train and bus depots or where ever an overhead lifeline system is necessary.
- **Davit Arm Systems** for rail or flatbed fall protection and material handling.
- **Rigid Rail & Trolley Systems** for fall protection where there is low overhead clearance.
- **Confined Space Entry & Retrieval Systems** for unique applications.
- **Safety & Debris Containment Systems** for construction & renovation projects.



Horizontal Lifeline at a bus depot.

Safe Approach can meet all your fall protection needs. We specialize in custom applications.



Outdoor Davit & Lifeline at a manufacturing facility.

Safe Approach is your one-stop shop.

- Design
- Fabrication
- Testing
- Installation



Custom debris containment at a re-roof project.

All fall protection systems are developed for your specific site project. They are designed and installed by professionals to meet all current OSHA and ANSI requirements for each individual application. We can also provide training in the use of our products, an invaluable feature when you're dealing with something custom. At Safe Approach, fall protection is our business, we're constantly striving to find new and innovative ways to help people work safer.




Overhead trolley system at a manufacturing facility.



SITE SPECIFIC FALL PROTECTION SYSTEMS

Ladder Systems

Safe Approach ladder safety systems are designed to work with most standard fixed ladders. Available with a flexible cable or with a rigid rail type system, they are an economical way to protect even the tallest ladders. Systems fit most standard ladders with 12" rung spacing, but they can be custom configured to fit any ladder.

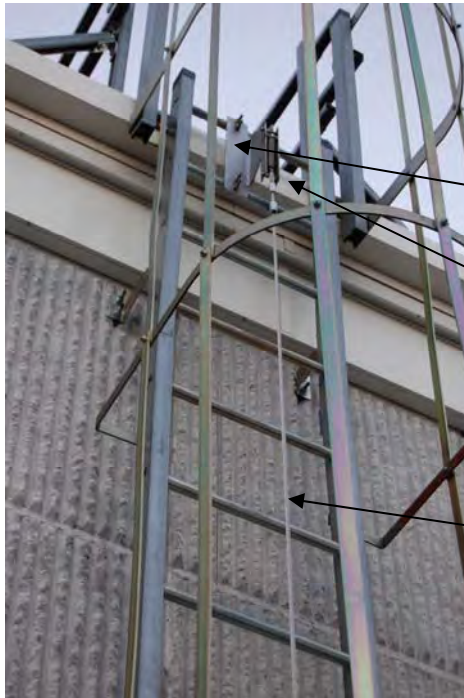

TYPICAL CABLE SYSTEM SHOWN

Top Bracket

Energy Absorber

Cable Grab

Cable

Bottom Bracket



SHOWN Cable System

Model No.	Description
P-01500	Cable System Mounting Bracket—Stainless Steel (includes attaching hardware)
P-01510	Energy Absorber—Stainless Steel
P-01520-XX*	Safety Cable Assembly—5/16" Stainless Steel (includes cable, turnbuckle & all hardware)
P-01530	Cable Grab—Stainless Steel (for 5/16" Cable)

* Replace XX with desired system length

Rigid Rail System

Model No.	Description
P-03700-XX*	Rigid Rail—Aluminum (includes all attaching hardware)
P-03705-XX*	Rigid Rail—Stainless Steel (includes all attaching hardware)
P-03710	Safety Trolley—Aluminum
P-03715	Safety Trolley—Stainless Steel
P-03720	3'-6" Removable Extension For Top of Ladder—Aluminum
P-03725	3'-6" Removable Extension For Top of Ladder—Stainless Steel

* Replace XX with desired system length



SITE SPECIFIC FALL PROTECTION SYSTEMS

Railing Systems



The Safe Approach railing system is designed to be a safe, cost effective solution for areas requiring railings where roof penetrations are not desirable. Fabricated from durable hot dip galvanized steel, you can expect long lasting performance that is virtually maintenance free. The railing systems meet or exceed all current OSHA regulations for railing systems, including the 200lb force at the top rail. Because the system does not require roof penetrations or special fabrication work to set up, installation costs are kept low. All railing components carry a one year warranty.



- **Safe** Safe Approach railing systems meet or exceed all current regulations for guardrail systems. No penetrations means years of trouble free service and no roof leaks to worry about.
- **Durable** All components are made of durable hot dip galvanized steel. The railing system is virtually maintenance free.
- **Modular** Prefabricated pieces can be assembled together in virtually any configuration imaginable. No special fabrication work is required to install the systems.
- **Cost Effective** Because the railing systems are non-penetrating, there is a significant decrease in installation costs as no roofing work is required. Installing a railing system instead of a fall arrest system can also significantly decrease the costs associated with training and maintenance.
- **Compliant** Fully compliant with OSHA 29 CFR 1910.23 & 29 CFR 1926.